



TL-FCSYL02



Wall Washer light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 50,000 hours)

Body Type: Aluminium Alloy body

Diffuser: Tempered Glass

Light Source: Cree or Equivalent

Input Voltage: 220 - 240V

Lumens: 90 - 140 lm/W

Operating Temperature: - 20°C + 55°C




Beam Angle: 3°, 5°, 6°, 8°, 12°, 15°, 20°, 24°, 30°, 38°, 45°, 60°, 5x20°, 10x45°, 10x60°, 10x70°

Body Color: Grey / Customized

On Request: Other Wattage & Dimension Variants



Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com

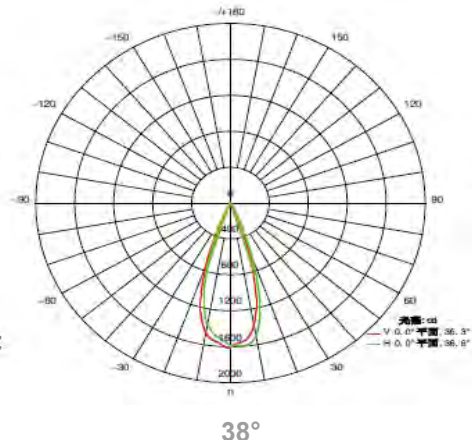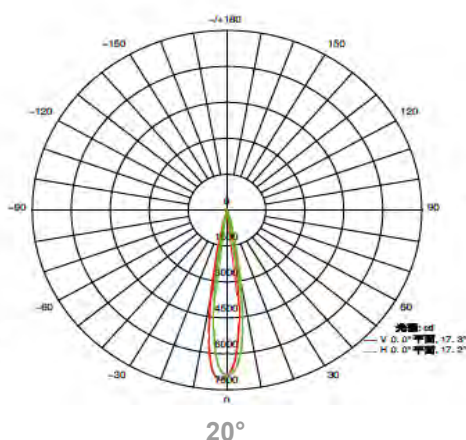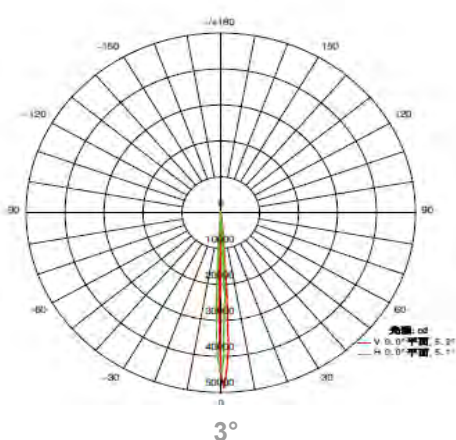

Product Variants

Product Code	Wattage	CCT	Dimension DxH (MM)
TL-FCSYL02-01	10W, 12W	2700K - 6500K, RGBW	82 x 120mm
TL-FCSYL02-02	15W, 20W, 30W	2700K - 6500K, RGBW	108 x 154mm
TL-FCSYL02-03	45W, 50W	2700K - 6500K, RGBW	147 x 198mm

