



TL-BLDRA1

IP 65	IP 66	IK08	- 20°C + 55°C	>0.9PF	CE		CRI >80	L90 50,000h	LED
----------	----------	------	------------------	--------	----	--	------------	----------------	-----

Bollard light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Die cast Aluminium housing, Corrosion & Shock Resistant

Diffuser: UV Stabalized PC

Light Source: Philips, Osram or Equivalent

Driver: Meanwell, Eaglerise, Kegu or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: 100 - 277V AC

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Body Color: Black, Graphie or Custom Finish

Dimmable: 1-10V & Dali

On Request: Other Wattage & Dimension Variants



Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com

A



B



C





TL-BLDRA1-01-(10-20W) / H -A-B-C

Height (H) - Customized Options

Wattage (W) - Customized Options

Lumens (lm) - 100 - 120 lm/W

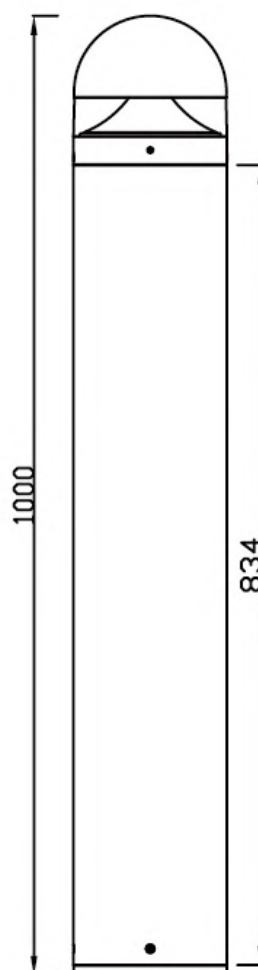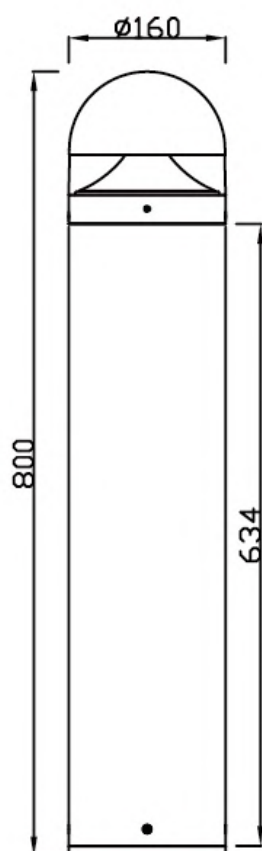

A



TL-BLDRA1-02-(10-20W) / H



Height (H) - Customized Options

Wattage (W) - Customized Options

Lumens (lm) - 100 - 120 lm/W






TL-BLDRA1-03-(10-50W) / H -A-B-C

Height (H) - Customized Options

Wattage (W) - Customized Options

Lumens (lm) - 100 - 120 lm/W

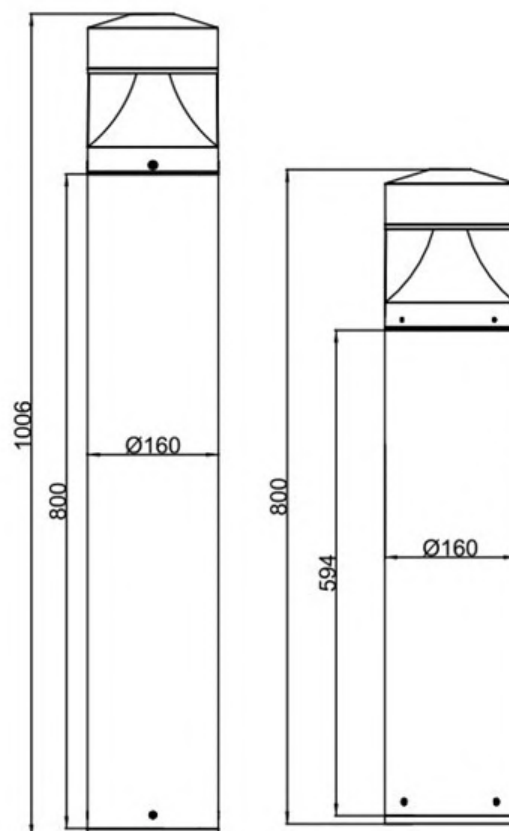


A**B****C**

TL-BLDRA1-04-(10-50W) / H -A-B-C

Height (H) - Customized Options

Wattage (W) - Customized Options

Lumens (lm) - 100 - 120 lm/W

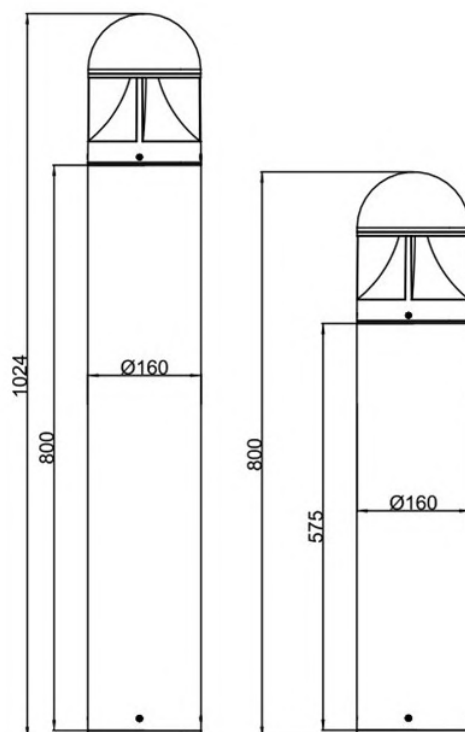






TL-BLDRA1-05-(10-50W) / H -A-B-C


Height (H) - Customized Options

Wattage (W) - Customized Options


Lumens (lm) - 100 - 120 lm/W



TL-BLDRA1-06-(10W) / H

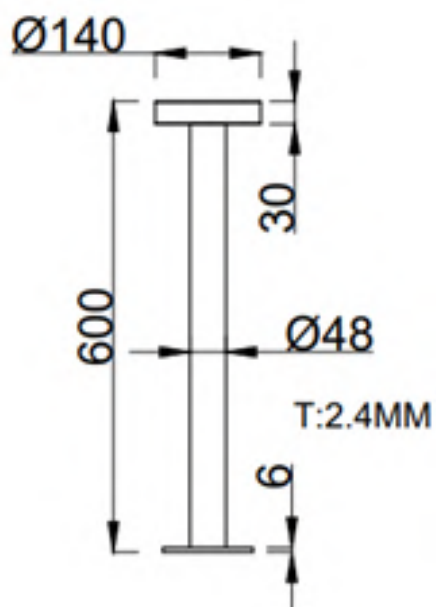

TL-BLDRA1-02-(10 - 20 W) / H

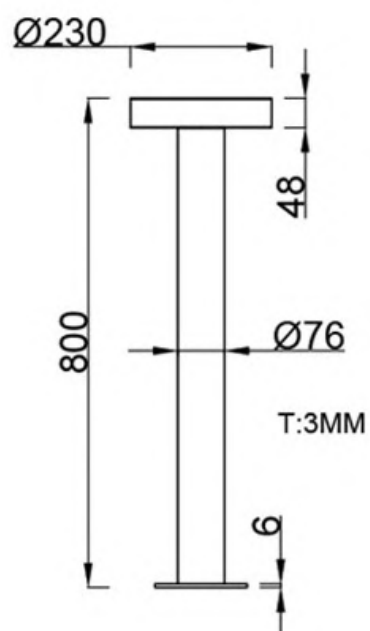


Height (H) - Customized Options

Wattage (W) - Customized Options

Lumens (lm) - 100 - 120 lm/W



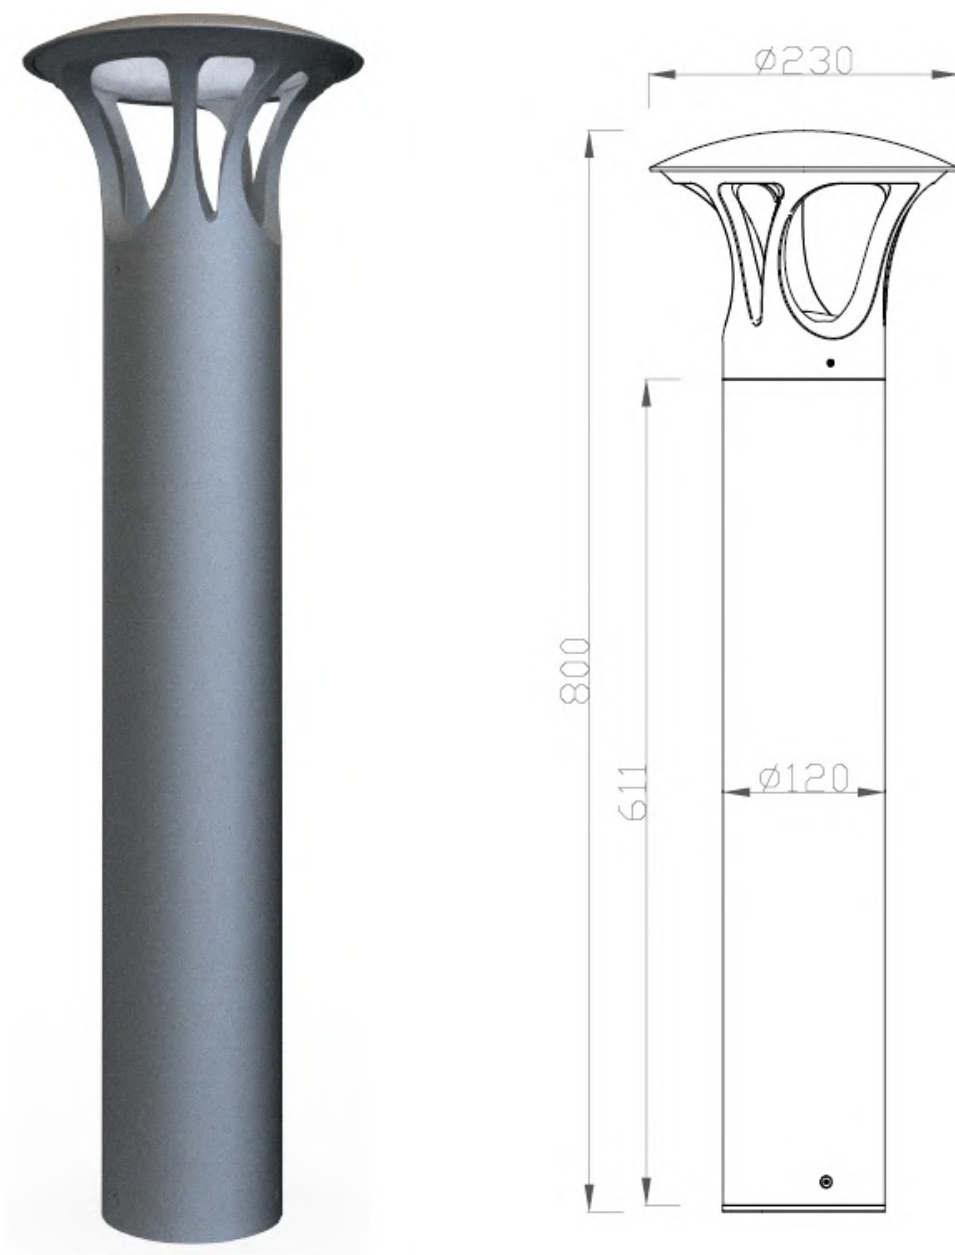

TL-BLDRA1-07-(10-20W) / H

Height (H) - Customized Options

Wattage (W) - Customized Options

Lumens (lm) - 100 - 120 lm/W

