


TL-S-STLDA2 SERIES

All In Two Solar Street Light



Monocrystalline Solar Panel

Monocrystalline silicon solar photovoltaic panels have high photoelectric conversion efficiency. To be fully charged in only 6--8 hours.

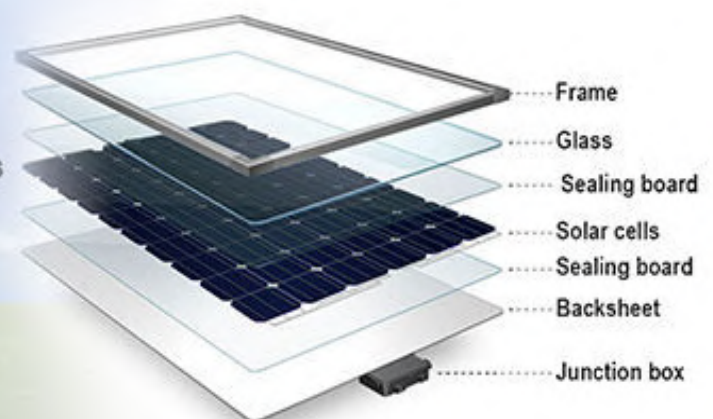

Body Type: Aluminium

Diffuser: UV stabilized PC

Solar Panel: Mono Crystalline

Battery: LifePO4 Lithium Battery

Working Mode: Intelligent Control

Light Source: Philips Or Equivalent

Color Temperature: 2700K to 6500K

Beam Angle: 75°+140°

IP Rating: IP65

Charging Time: 4 - 5 Hours Direct Sunlight


Body Color: White as Standard / Other Color on Request



Working Mode 1 : Smart Lighting Mode Settable as per Requirement

SMART LIGHTING MODE

Automatic Time Control Mode

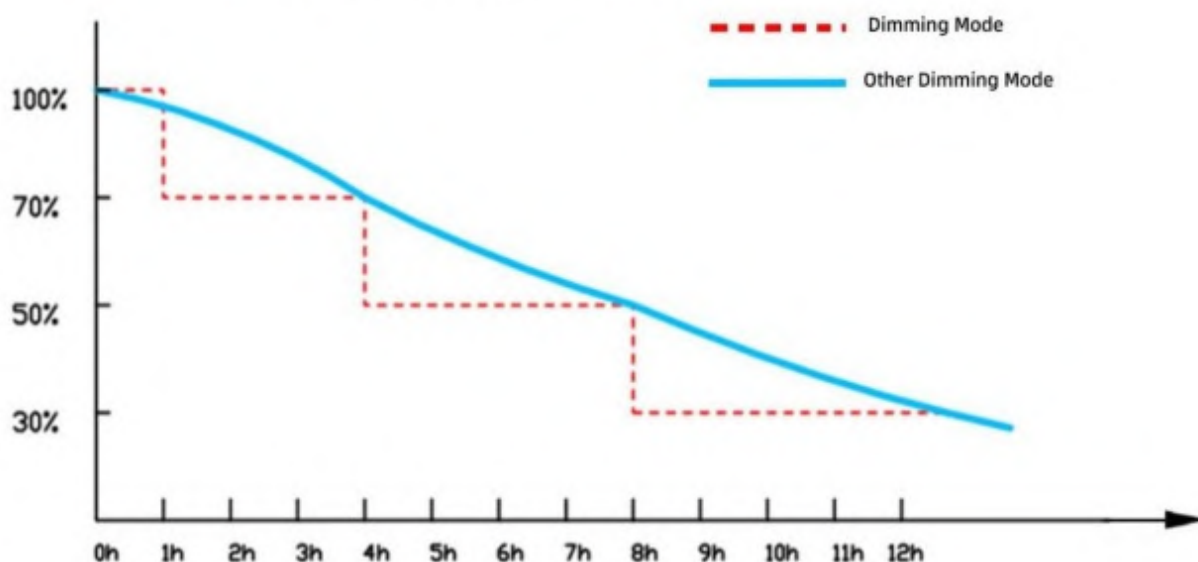

Automatic charging during the day, automatic lighting at night, alternating day and night

1 hour 100% brightness; 2-4 hours 70% brightness


4-8 hours 50% brightness; 8-12 hours 30% brightness

Working Mode 2 : 100% Brightness 1- 12 hours







TL-S-STLDA2-01- 8000 lm - 2000 lm

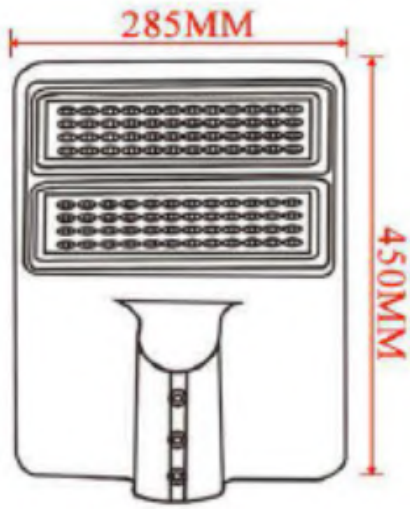

TL-S-STLDA2-02- 12000 lm - 3000 lm

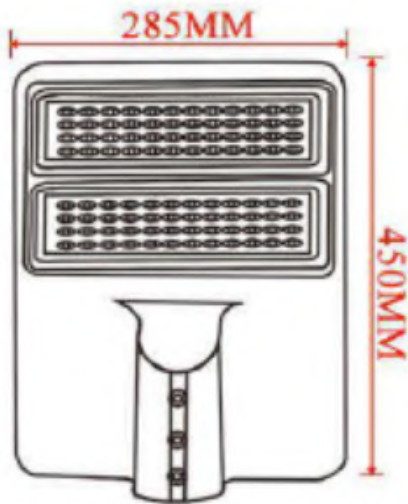


TL-S-STLDA2-03- 15000 lm - 4000 lm

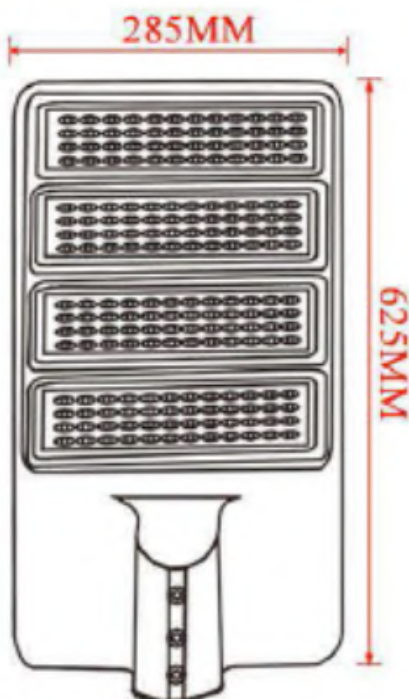



TL-S-STLDA2-04- 12000 lm - 4000 lm

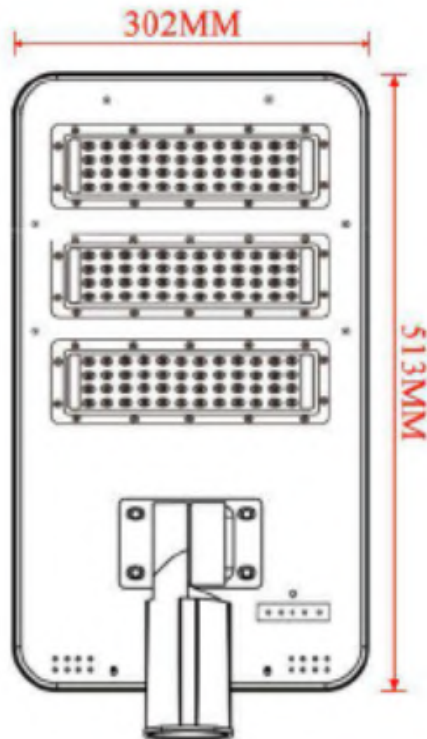

TL-S-STLDA2-05- 15000 lm - 4000 lm

