


TL-S-WWLD A SERIES



Monocrystalline Solar Panel

Monocrystalline silicon solar photovoltaic panels have high photoelectric conversion efficiency. To be fully charged in only 6--8 hours.

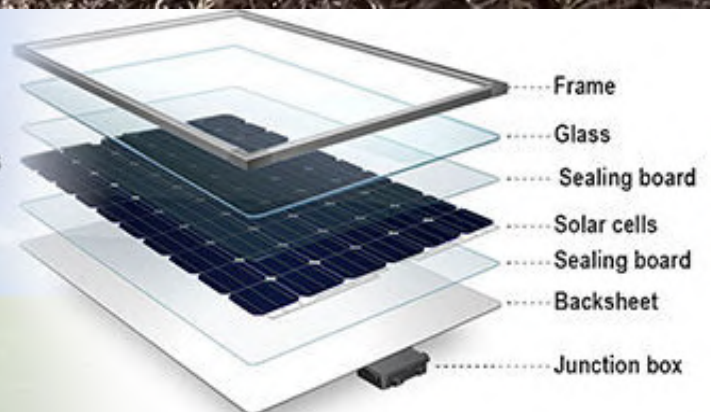

TEMPLUX

Body Type: Aluminium

Diffuser: UV stabilized PC

Solar Panel: Mono Crystalline

Battery: LifePO4 Lithium Battery

Working Mode: Intelligent Control

Light Source: Philips Or Equivalent

Color Temperature: 2700K to 6500K

Beam Angle: 70° - 140°

IP Rating: IP65, IP66

IK Rating: IK08

Charging Time: 4 - 5 Hours Direct Sunlight


Body Color: Black as Standard / Other Color on Request

Working Mode 1 : Smart Lighting Mode Settable as per Requirement



SMART LIGHTING MODE

Automatic Time Control Mode

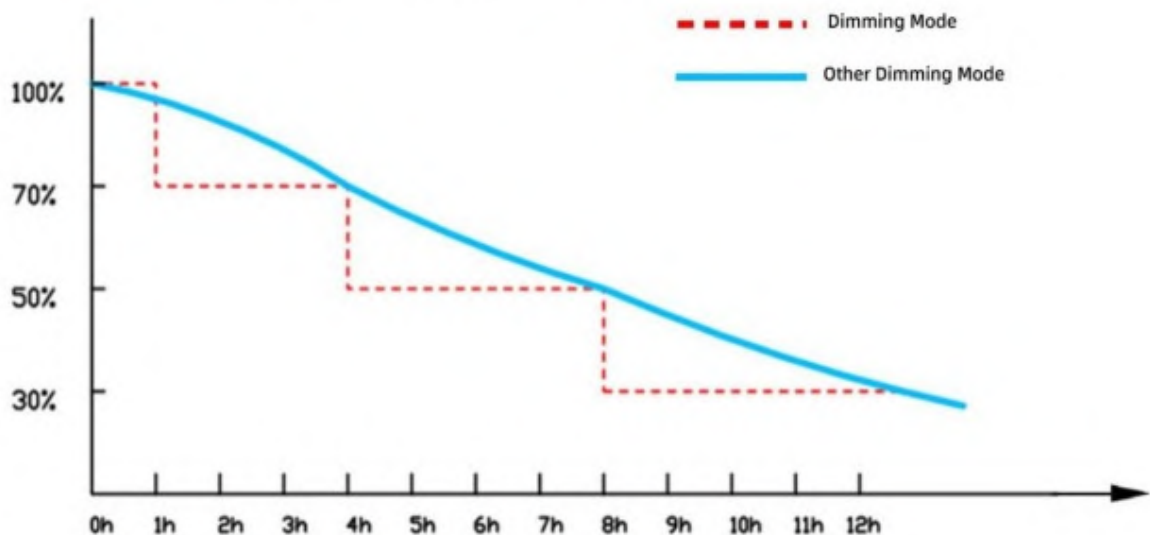

Automatic charging during the day, automatic lighting at night, alternating day and night

1 hour 100% brightness; 2-4 hours 70% brightness


4-8 hours 50% brightness; 8-12 hours 30% brightness

Working Mode 2 : 100% Brightness 1- 12 hours



TL-S-WWLDA-01- 6000 lm - 2000 lm
Dimension: L 450 X 390 X 130 mm

TL-S-WWLDA-02- 8000 lm - 3000 lm
Dimension: L 730 X 390 X 130 mm

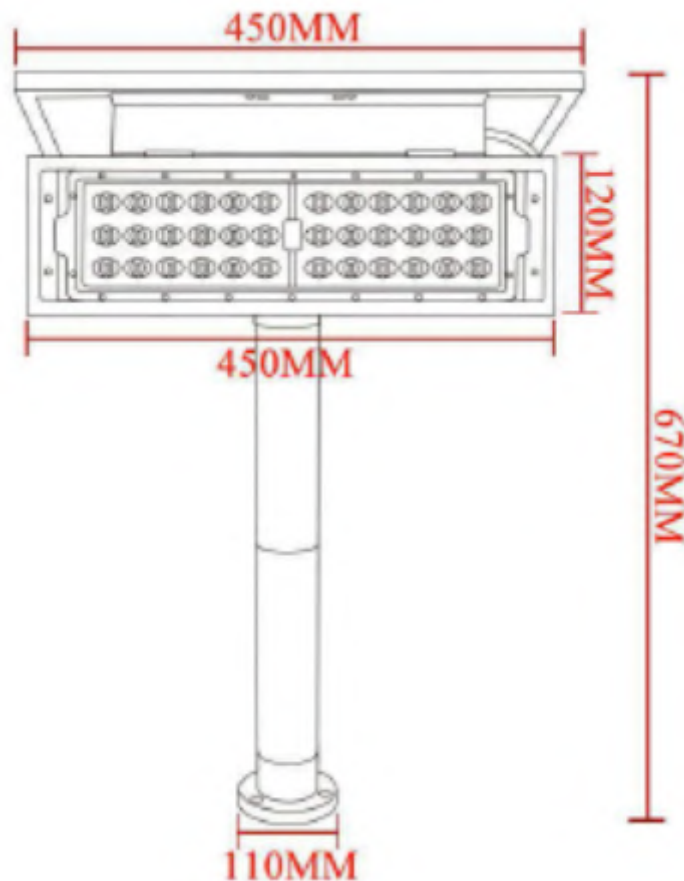

TL-S-WWLDA-03- 3000 lm - 1000 lm
Dimension: L 590 X 200 X 50 mm



TL-S-WWLDA-04- 6000 lm - 2000 lm
Dimension: L 1155 X 200 X 50 mm

