

TL-S-STLDA3 SERIES



**ALL IN ONE
SOLAR STREET LIGHT**
0 electricity fee no wiring required
work continuously for 3-5 rainy and cloudy days



IP65



Lithium Battery



Mono Solar Panel




High Lumen Chip



Intelligent Control

Monocrystalline Solar Panel

Monocrystalline silicon solar photovoltaic panels have high photoelectric conversion efficiency. To be fully charged in only 6--8 hours.

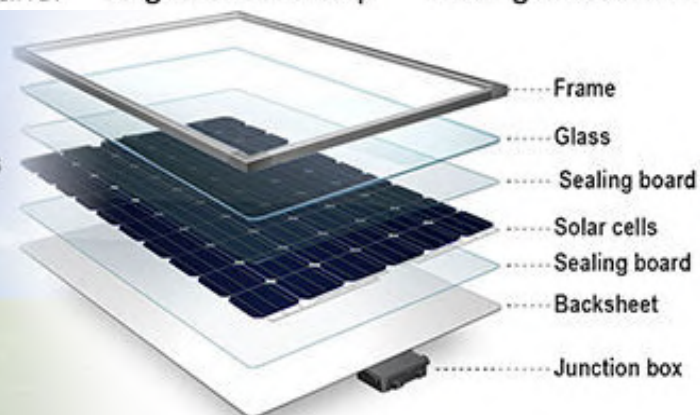

Body Type: Aluminium

Diffuser: UV stabilized PC

Solar Panel: Mono Crystalline

Battery: LifePO4 Lithium Battery

Working Mode: Intelligent Control

Light Source: Philips Or Equivalent

Chromaticity tolerance (MacAdam) : 3

Longer life (L90B10 @ 50,000 hours)

Color Temperature: 2700K to 6500K

Beam Angle: 75°+145°

IP Rating: IP65, IP66 on Request

IK Rating: IK09 for Fitting, Solar Panel: IK07

Upon Request: Coating for Marine environments in compliance with UNI EN ISO 9227


Charging Time: 4 - 5 Hours Direct Sunlight

Body Color: White, Grey / Other Color on Request

Working Mode 1 : Smart Lighting Mode Settable as per Requirement



Automatic Time Control Mode

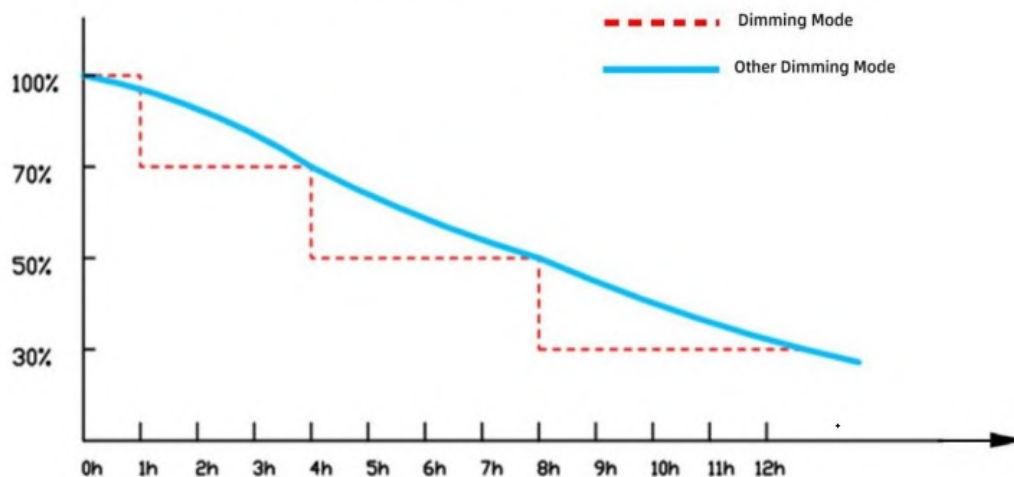

Automatic charging during the day, automatic lighting at night, alternating day and night


1 hour 100% brightness; 2-4 hours 70% brightness

4-8 hours 50% brightness; 8-12 hours 30% brightness

Working Mode 2 : Same Brightness 1- 12 hours



Monocrystalline Silicon
Solar Panel



Lithium Battery



LED Chips



Microwave Sensor



ON/OFF



Adjustable Angle 0-180°




TEMPLUX

TL-S-STLDA3-T12- 7000 lm - 3000 lm




TL-S-STLDA3-T13- 16000 lm - 5000 lm

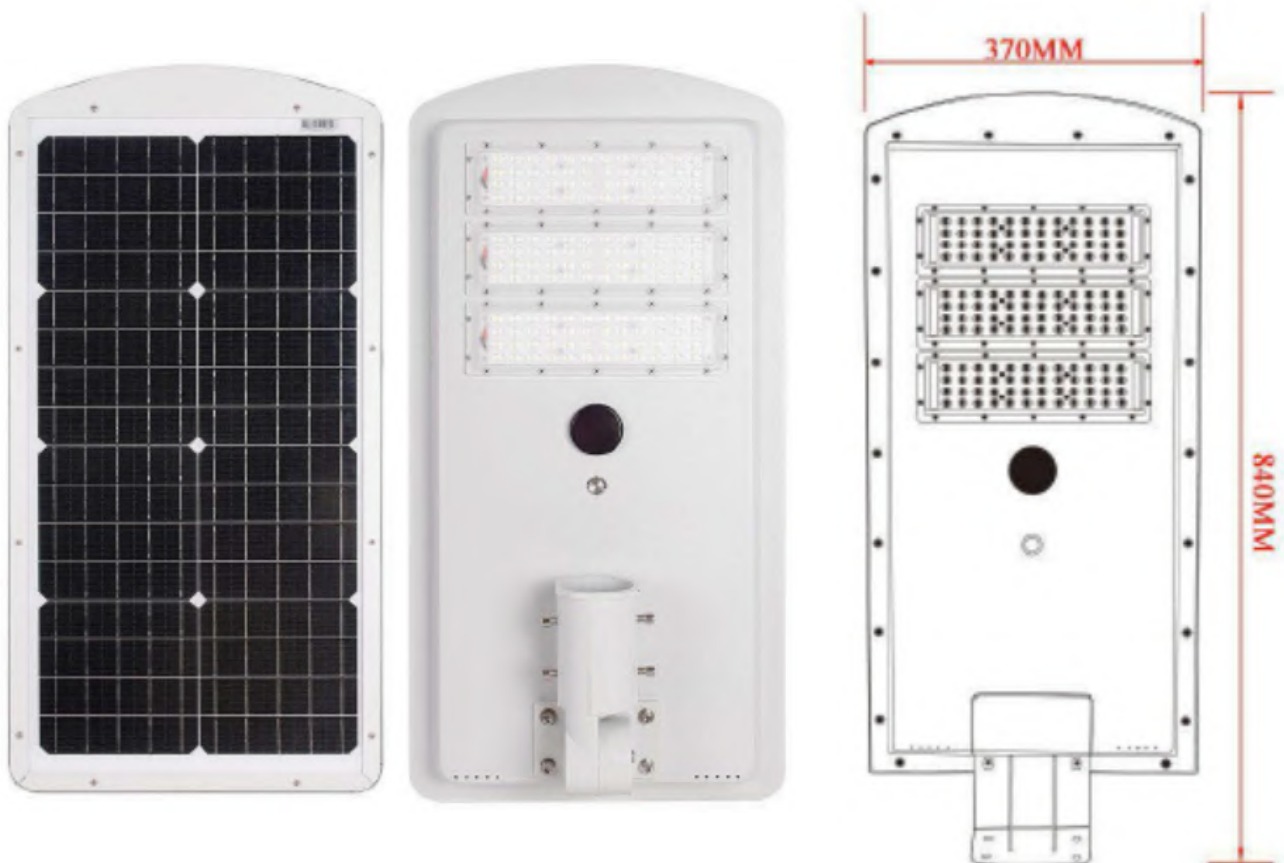




TL-S-STLDA3-T22- 12000 lm - 3000 lm

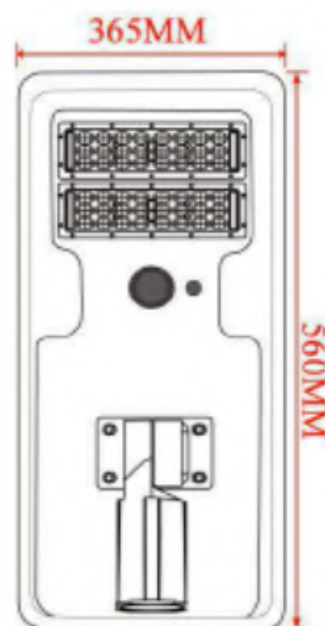

TL-S-STLDA3-T23- 17000 lm - 5000 Im

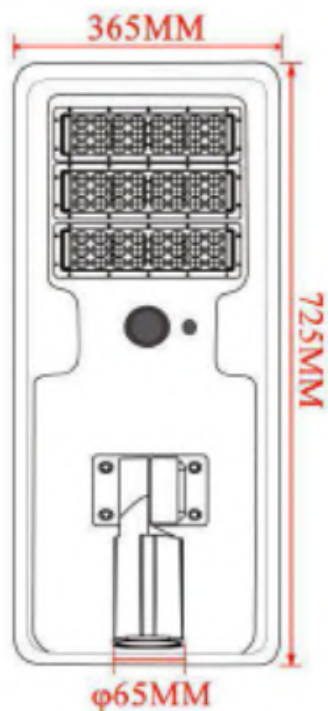

TL-S-STLDA3-T24- 23000 lm - 6000 Im

