



TL-SMDLIGY



Ceiling or Wall mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: PC

Diffuser: PC

Light Source: Tridonic, Philips or Equivalent

Driver: Tridonic, Philips or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 5°C to + 40°C

Beam Angle: 110°.

Body Color: White

Dimmable: 1-10V & Dali

Emergency: 1hrs or 3hrs Tridonic Kit

Sensor: Microwave Sensor on Request

On Request: Other Wattage & Dimension Variants






CROWN SHAPE -01



MUSHROOM SHAPE-02

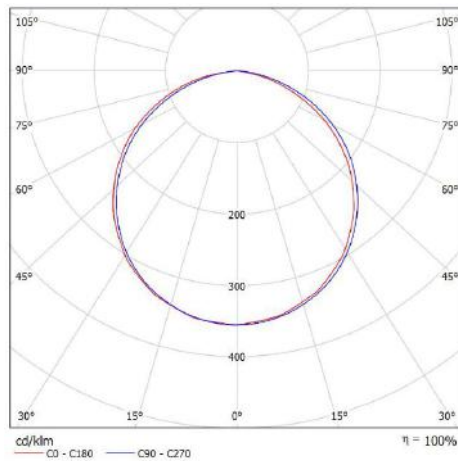

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (DxH MM)
TL-SMDLIGY-8W-01/02	8W	660lm	85 lm/W	3000K/6500K	180x70 MM
TL-SMDLIGY-12W-01/02	12W	1020lm	85 lm/W	3000K/6500K	280x95 MM
TL-SMDLIGY-18W-01/02	18W	1530lm	85 lm/W	3000K/6500K	360x105 MM
TL-SMDLIGY-22W-01/02	22W	2000lm	95 lm/W	3000K/6500K	410x115 MM
TL-SMDLIGY-32W-01/02	32W	2880lm	90 lm/W	3000K/6500K	410x115 MM
TL-SMDLIGY-40W-01/02	40W	3600lm	90 lm/W	3000K/6500K	500x140 MM

