



## TL-STP2



COB Led Strip & Profile. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90 B10 @ 50,000 hours)

Light Source: Philips Or Cree Or Osram

150 lm/W or 125 lm/W or 100 lm/W

Driver: Meanwell Or Tridonic Or Philips

Input Voltage: 220-240V AC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 55°C

Dimmable: Dali




Chromaticity tolerance (MacAdam) : 3


Various controllers for Flexible Led Strip

Super Adhesive 3M Back Tape

On Request: Other Wattage & Dimension Variants



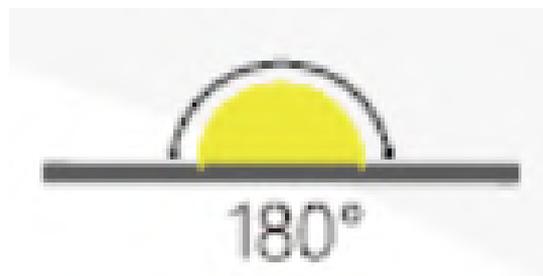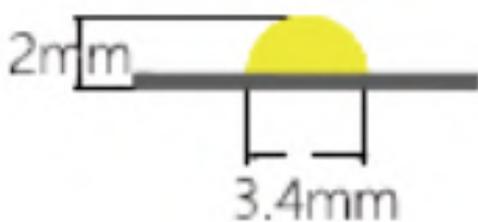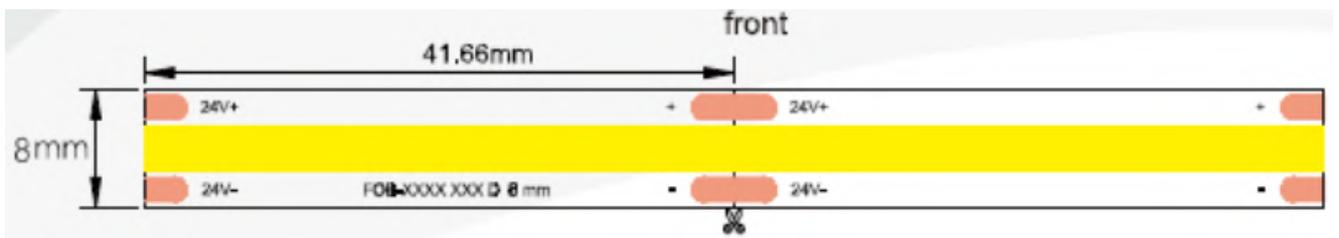

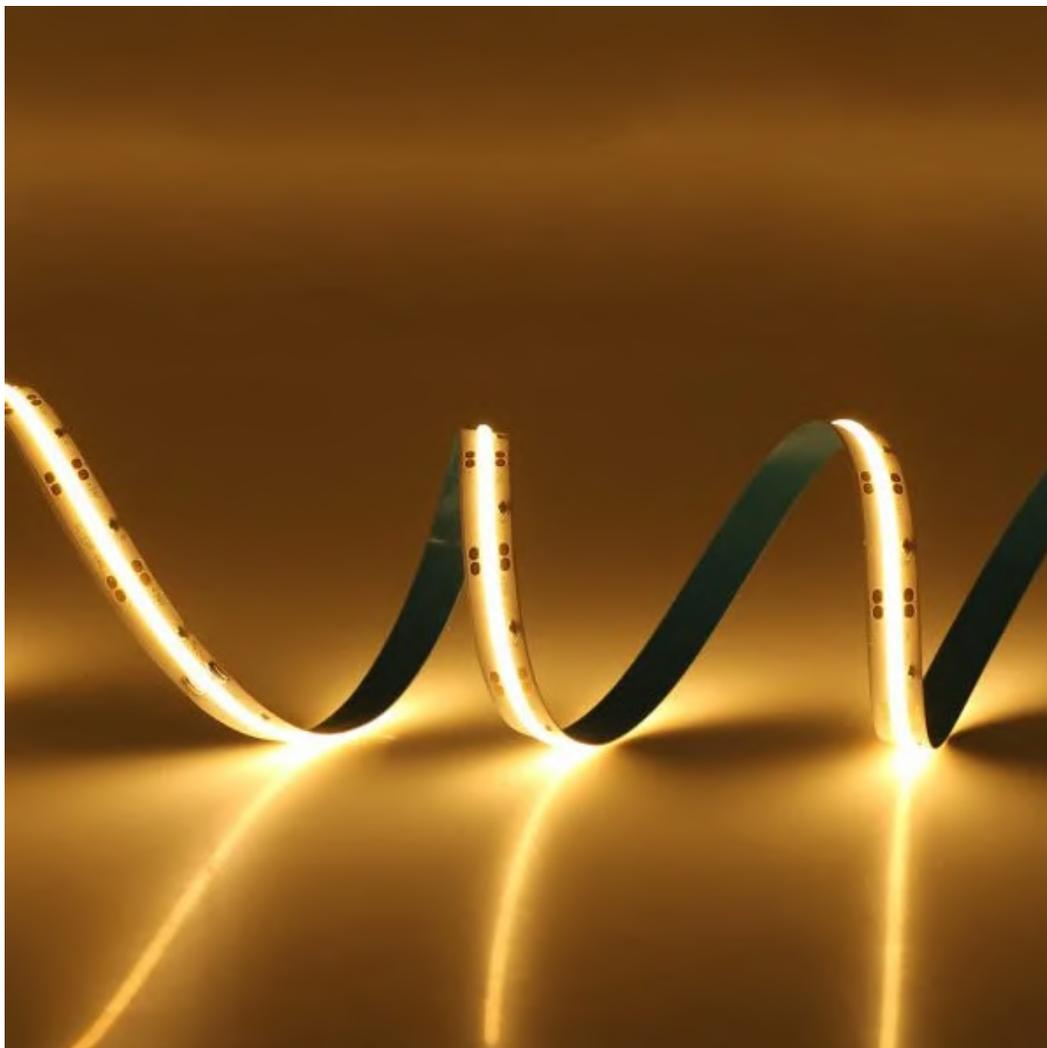

LEDs without any cover



IP20

Epoxy / PU / Silicon Glue



IP65

Silicon Tube with air inside



IP67

Silicon Tube with Glue inside without air



IP68


**DC24V**  
**DC12V**

### Product Variants

CODE	WATTAGE	COLOR	Input Voltage	LUMENS	IP
TL-STP2	4W /M	ULTARA WARM WHITE	DC 24V	CUSTOMIZED	20
	6W /M	WARM WHITE	DC 12V	100 - 150 lm/W	65
	9W /M	NATURAL WHITE			67
	12W /M	WHITE			68
	14W /M	COOL WHITE			
	19W /M	RED OR GREEN OR BLUE OR AM			
	24W/M	RGB OR RGBW OR WW+CW			



# LUMINOUS INTENSITY DISTRIBUTION

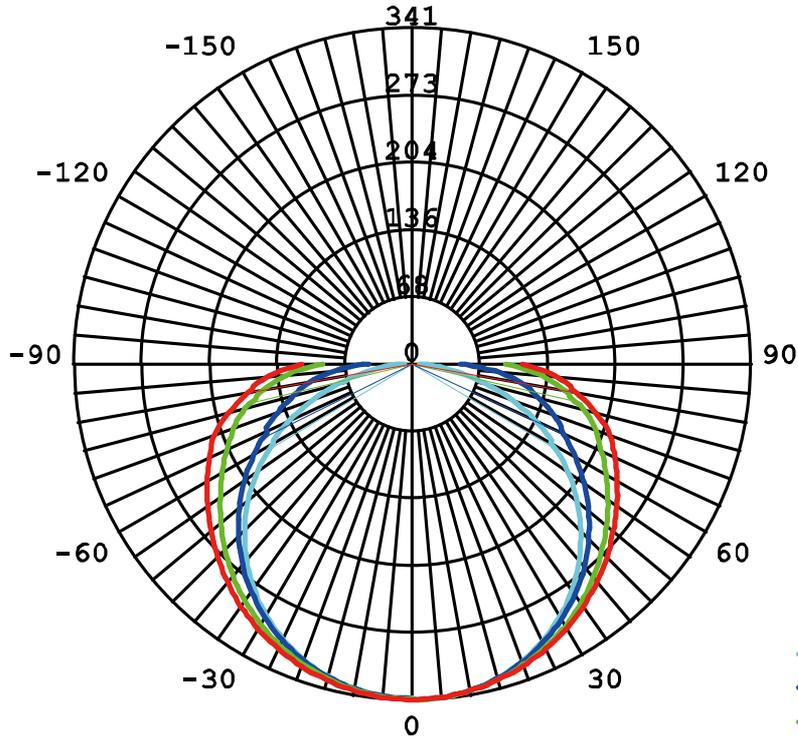

AVERAGE BEAM ANGLE (50%) : 139.6 DEG

