



TL-FLKH3



Flood light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (A - L90B10 @ 100,000 hours) (B - L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: Tempered Glass

Light Source: Cree or Philips

Driver: Meanwell, Inventronics, Philips or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: AC 220 - 265V

SPD: 6KV, 10KV, 20KV

Driver Protection: Class I

Operating Temperature: - 20°C + 60°C








Beam Angle: 30°,60°,90°,T2,T3,T4,T5

Body Color: Black / Grey

Dimmable: Dali, 1-10V Optional

On Request: Other Wattage & Dimension Variants



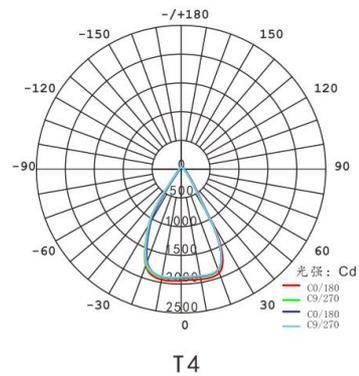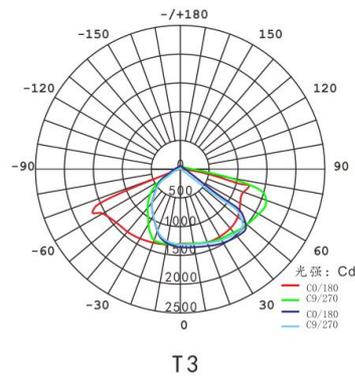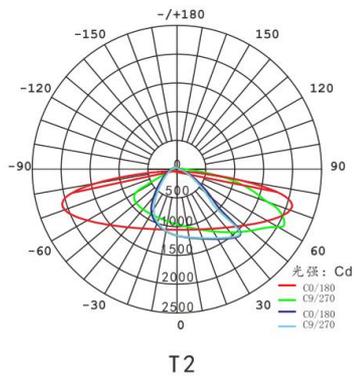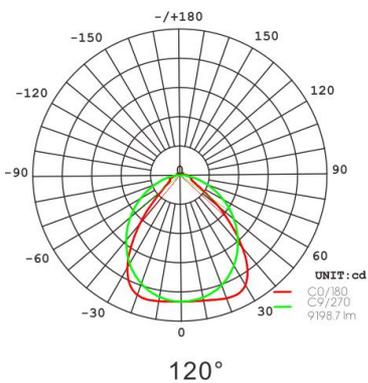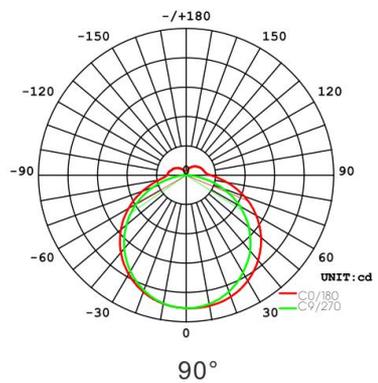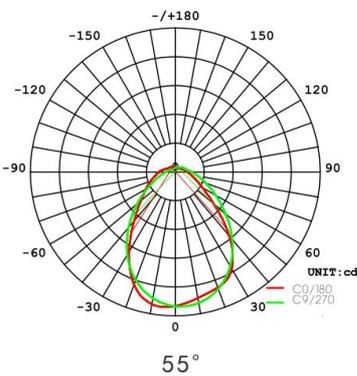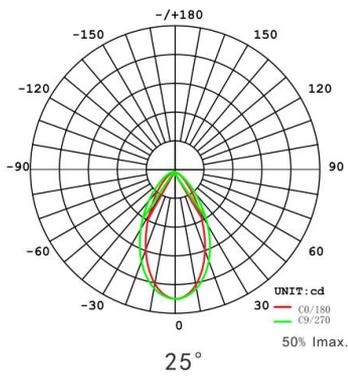



50W(S)

50W

100W

150W


200W




300W

400-500W


600W

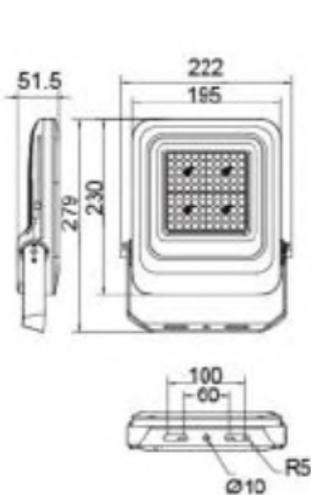

50W(S)


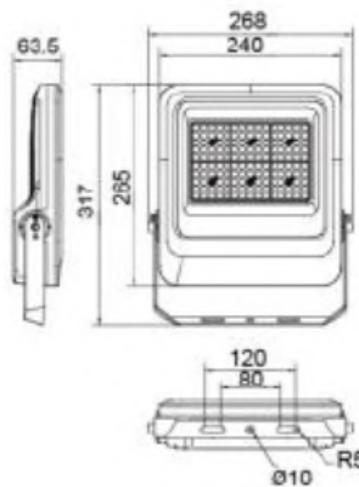


50W


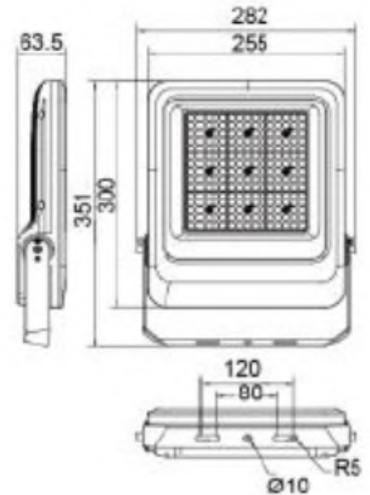


100W





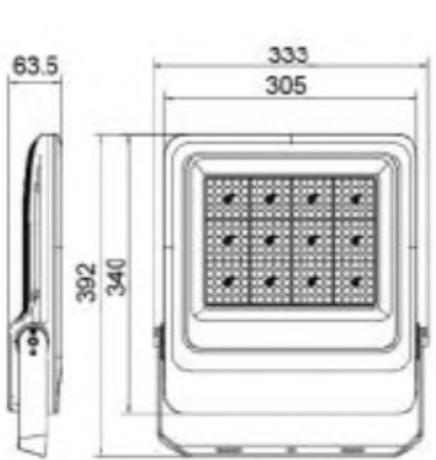



150W

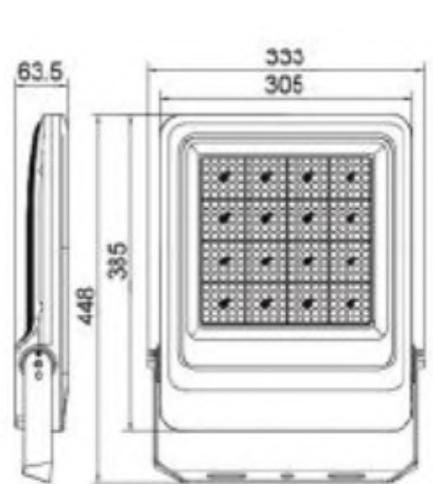



200W

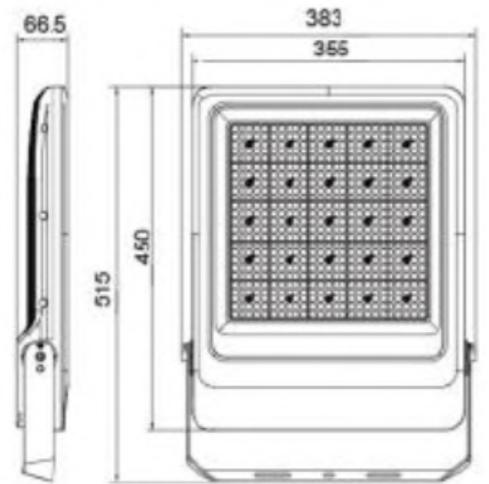

300W

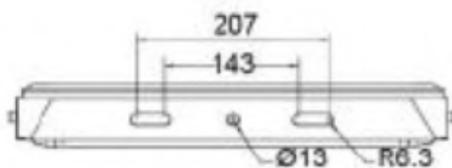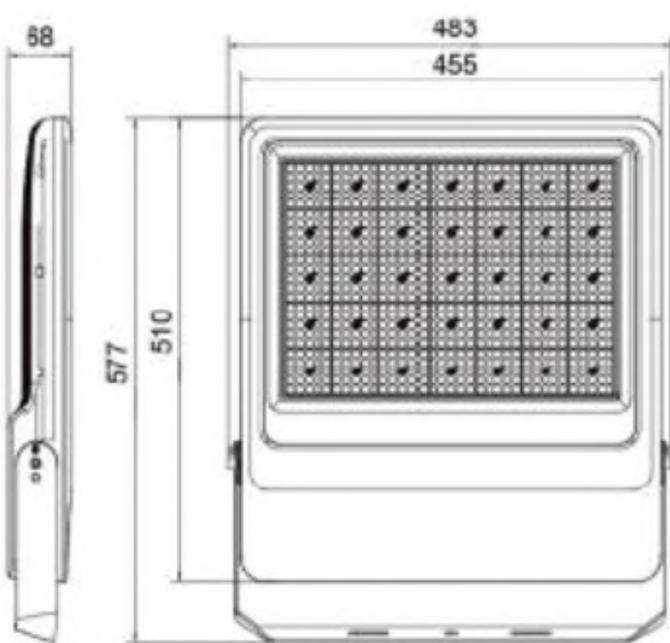

400-500W

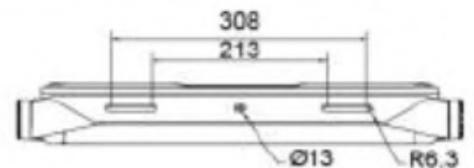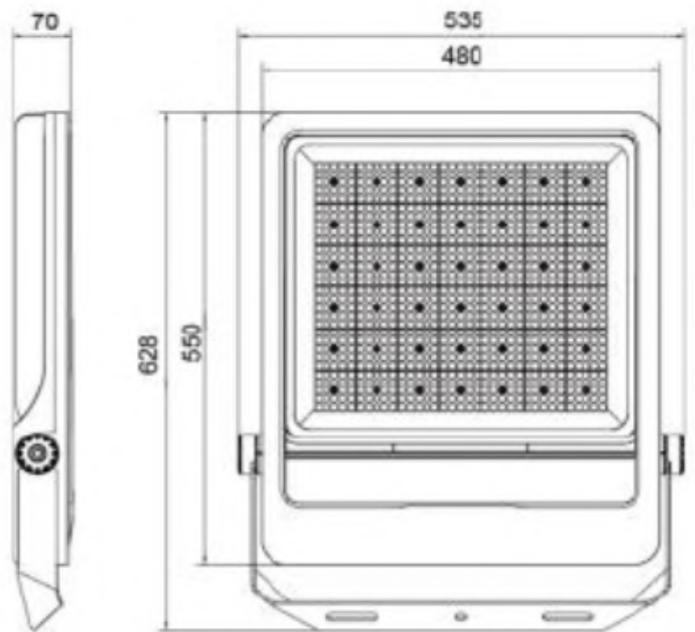

600W





Building Lighting
 Landscape Lighting
 Commercial & Advertising
 Sports Venues
 Industrial & Safety

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (mm)
TL-FLKH3-50 - A/B	50W	7000 lm	150 lm/W	3000K-6500K	317x268x63.5
TL-FLKH3-100 -A/B	100W	15000 lm	150 lm/W	3000K-6500K	351x282x63.5
TL-FLKH3-150 -A/B	150W	22500 lm	150 lm/W	3000K-6500K	392x333x63.5
TL-FLKH3-200 -A/B	200W	30000 lm	150 lm/W	3000K-6500K	448x333x63.5
TL-FLKH3-300 -A/B	300W	45000 lm	150 lm/W	3000K-6500K	515x383x63.5
TL-FLKH3-400 -A/B	400W	60000 lm	150 lm/W	3000K-6500K	577x483x68
TL-FLKH3-500 -A/B	500W	75000 lm	150 lm/W	3000K-6500K	577x483x68
TL-FLKH3-600 -A/B	600W	90000 lm	150 lm/W	3000K-6500K	628x535x70

